

**DIVA** **LUCE**  
light & form

[www.divaluce.com](http://www.divaluce.com)

**OUTDOOR**

**24 | 25**  
ARCHITECTURAL<sup>+</sup>

**DIVA LUCE**  
light & form

**ARCHITECTURAL LIGHTING +**

# ARCHITECTURAL OUTDOOR

WALL LIGHT	05-12
STEP LIGHT	13-14
BOLLARD	15-44
SPIKE LIGHT	45-46
PARK LIGHTING	47-60

## WALL LIGHT

<p><b>OZO</b> series</p>  <p>DLL-1029-10 10W PAGE.06</p>	<p><b>AVO</b> series</p>  <p>DLL-1122-10 10W PAGE.06</p>	<p><b>CLEO</b> series</p>  <p>DLL-1125-12 12W PAGE.08</p>	<p><b>HEXA</b> series</p>  <p>DLL-1115-12 12W PAGE.08</p>	<p><b>INTAKE</b> series</p>  <p>DLL-006F-03 3W PAGE.09</p>	<p><b>WAVE</b> series</p>  <p>DLL-8006-05 5W PAGE.09</p>
<p><b>BEAM</b> series</p>  <p>DLL-9205-10 10W PAGE.11</p>	<p><b>BEAM</b> series</p>  <p>DLL-9088/DLL-9089 5W/10W PAGE.11</p>				

## STEP LIGHT



<p><b>SPLASH</b> series</p>  <p>DLL-00028A-05 5W PAGE.14</p>	<p><b>SPLASH</b> series</p>  <p>DLL-01403-05 5W PAGE.14</p>
--	---

## BOLLARD

<p><b>ESTA</b> series</p>  <p>DLL-1106/DLL-1107 4W PAGE.16</p>	<p><b>ESTA</b> series</p>  <p>DLL-1108/DLL-1109 9W PAGE.16</p>	<p><b>ESTA</b> series</p>  <p>DLL-1110/DLL-1111 9W PAGE.16</p>	<p><b>OZO</b> series</p>  <p>DLL-1031-10 10W PAGE.17</p>	<p><b>OZO</b> series</p>  <p>DLL-1032-10 10W PAGE.17</p>	<p><b>OZO</b> series</p>  <p>DLL-1033-20 20W PAGE.17</p>
<p><b>AVO</b> series</p>  <p>DLL-1123-10 10W PAGE.19</p>	<p><b>AVO</b> series</p>  <p>DLL-1124-10 10W PAGE.19</p>	<p><b>CLEO</b> series</p>  <p>DLL-1126-12 12W PAGE.22</p>	<p><b>CLEO</b> series</p>  <p>DLL-1127-12 12W PAGE.22</p>	<p><b>PUK</b> series</p>  <p>DLL-1113-15 15W PAGE.24</p>	<p><b>PUK</b> series</p>  <p>DLL-1114-15 15W PAGE.24</p>

<b>PINO series</b>  DLB-1112-05 5W PAGE.24	<b>INDI series</b>  DLL-1118-16 15W+1W PAGE.25	<b>INDI series</b>  DLL-1119-16 15W+1W PAGE.25	<b>SAT series</b>  DLL-7024-05 7W PAGE.27	<b>ARCO series</b>  DLL-1970-05 5W PAGE.27	<b>PICO series</b>  DLL-6039-05 5W PAGE.27
<b>BLOCK series</b>  DLL-1136-07 7W PAGE.30	<b>BLOCK series</b>  DLL-1137-10 10W PAGE.30	<b>DUNE series</b>  DLL-9110-13 13.5W PAGE.32	<b>DUNE series</b>  DLL-9111-09 9W PAGE.32	<b>PHALT series</b>  DLL-1475/DLL-1476 5W PAGE.33	<b>PHALT DOUBLE series</b>  DLL-1477/DLL-1478 10W PAGE.33
<b>DINO series</b>  DLL-2670-10 10W PAGE.36	<b>DINO series</b>  DLL-0106-05 7W PAGE.36	<b>CAPE series</b>  DLL-1370-07 5W PAGE.36	<b>DIME series</b>  DLL-13A-TC109-06 6.5W PAGE.38	<b>GOOSET series</b>  DLL-1146-05 5W PAGE.38	<b>PLANK series</b>  DLB-1167 5W PAGE.39
<b>NORA series</b>  DLK-9091 12W PAGE.41	<b>NORA series</b>  DLK-9095 10W PAGE.41	<b>NORA series</b>  DLB-1192 12W PAGE.44	<b>CAVO 2 series</b>  DLC-6056 5W PAGE.44		

**PARK LIGHTING**

<b>TEE series</b>  DLL-13A-TC101-20 20W PAGE.48	<b>OZO series</b>  DLL-1030-45 45W PAGE.49	<b>UFO series</b>  DLL-1077-80 80W PAGE.51	<b>UFO series</b>  DLL-1076-160 2x80W PAGE.51	<b>VIVO series</b>  DLL-1090-50 50W PAGE.54	<b>VIVO DOUBLE series</b>  DHB-1093-60 2x30W PAGE.56
<b>CLUB series</b>  DLL-1091-50 50W PAGE.57	<b>CLUB series</b>  DLL-10920-100 2x50W PAGE.57	<b>CAVO series</b>  DLL-9035-30 30W PAGE.60	<b>CAVO series</b>  DLL-9036-60 2x30W PAGE.60	<b>CAVO series</b>  DLL-9037-30 30W PAGE.60	<b>CAVO series</b>  DLL-9034-60 2x30W PAGE.60

**SPIKE LIGHT**

<b>FUNNEL series</b>  DLL-13A-TC104-06 6W PAGE.46	<b>FUNNEL series</b>  DLL-13A-TC102-10 10W PAGE.46
--	---



	Light Source	Power	Voltage	Code
<b>OZO</b> series	SMD LED	10W	90-260V 50/60Hz	DLL-1029-10-K-SB DLL-1029-10-K-DG DLL-1029-10-K-SS DLL-1029-10-K-MG
<b>AVO</b> series	SMD LED	10W	90-260V 50/60Hz	DLL-1122-10-K-SB DLL-1122-10-K-DG DLL-1122-10-K-SS DLL-1122-10-K-MG

Color Temperature: K (3000K 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali


Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: Clear polycarbonate

**DIMENSION**  
unit:mm

**DLB-1029-10**

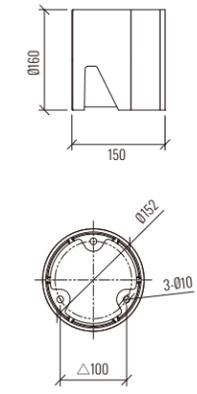

**DLB-1122-10**

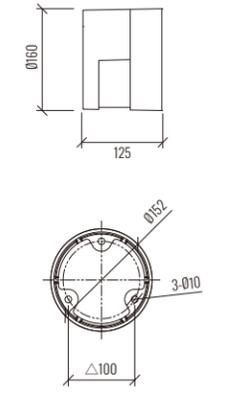



	Light Source	Power	Voltage	Code
<b>CLEO</b> series	SMD LED	10W	90-260V 50/60Hz	DLL-1125-12-K-SB DLL-1125-12-K-DG DLL-1125-12-K-SS DLL-1125-12-K-MG
<b>HEXA</b> series	SMD LED	10W	90-260V 50/60Hz	DLL-1115-12-K-SB DLL-1115-12-K-DG DLL-1115-12-K-SS DLL-1115-12-K-MG

Color Temperature: K (3000K 6000K)



Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali



Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: Clear polycarbonate

**DIMENSION**  
unit:mm

DLL-1125-12



DLB-1115-12





	Light Source	Power	Voltage	Code
<b>INTAKE</b> series	SMD LED	3W	90-260V 50/60Hz	DLL-006F-03-K-SB DLL-006F-03-K-DG DLL-006F-03-K-SS DLL-006F-03-K-MG
<b>WAVE</b> series	SMD LED	5W	90-260V 50/60Hz	DLL-8006-05-K-SB DLL-8006-05-K-DG DLL-8006-05-K-SS DLL-8006-05-K-MG

Color Temperature: K (3000K 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali


Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: Clear glass

**DIMENSION**  
unit:mm

DLL-006F-03



DLL-8006-05





	Light Source	Power	Voltage	Code
<b>BEAM</b> series	SMD LED	10W	90-260V 50/60Hz	DLL-9205-10-K-SB DLL-9205-10-K-DG DLL-9205-10-K-SS DLL-9205-10-K-MG
<b>BEAM</b> series	SMD LED	5W	90-260V 50/60Hz	DLL-9088-05-K-SB DLL-9088-05-K-DG DLL-9088-05-K-SS DLL-9088-05-K-MG
<b>BEAM</b> series	SMD LED	10W	90-260V 50/60Hz	DLL-9089-10-K-SB DLL-9089-10-K-DG DLL-9089-10-K-SS DLL-9089-10-K-MG

Color Temperature: K (3000K 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali


Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: Clear glass

**DIMENSION**  
unit:mm


DLL-9205-10



DLL-9088-05



DLL-9089-10





	Light Source	Power	Voltage	Code
<b>SPLASH series</b>	SMD LED	5W	90-260V 50/60Hz	DLL-00028A-05-K-SB DLL-00028A-05-K-DG DLL-00028A-05-K-SS DLL-00028A-05-K-MG
<b>SPLASH series</b>	SMD LED	5W	90-260V 50/60Hz	DLL-01403-05-K-SB DLL-01403-05-K-DG DLL-01403-05-K-SS DLL-01403-05-K-MG

Color Temperature: K (3000K 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali



Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: Clear glass

**DIMENSION**  
unit:mm

DLL-00028A-05



DLL-01403-05

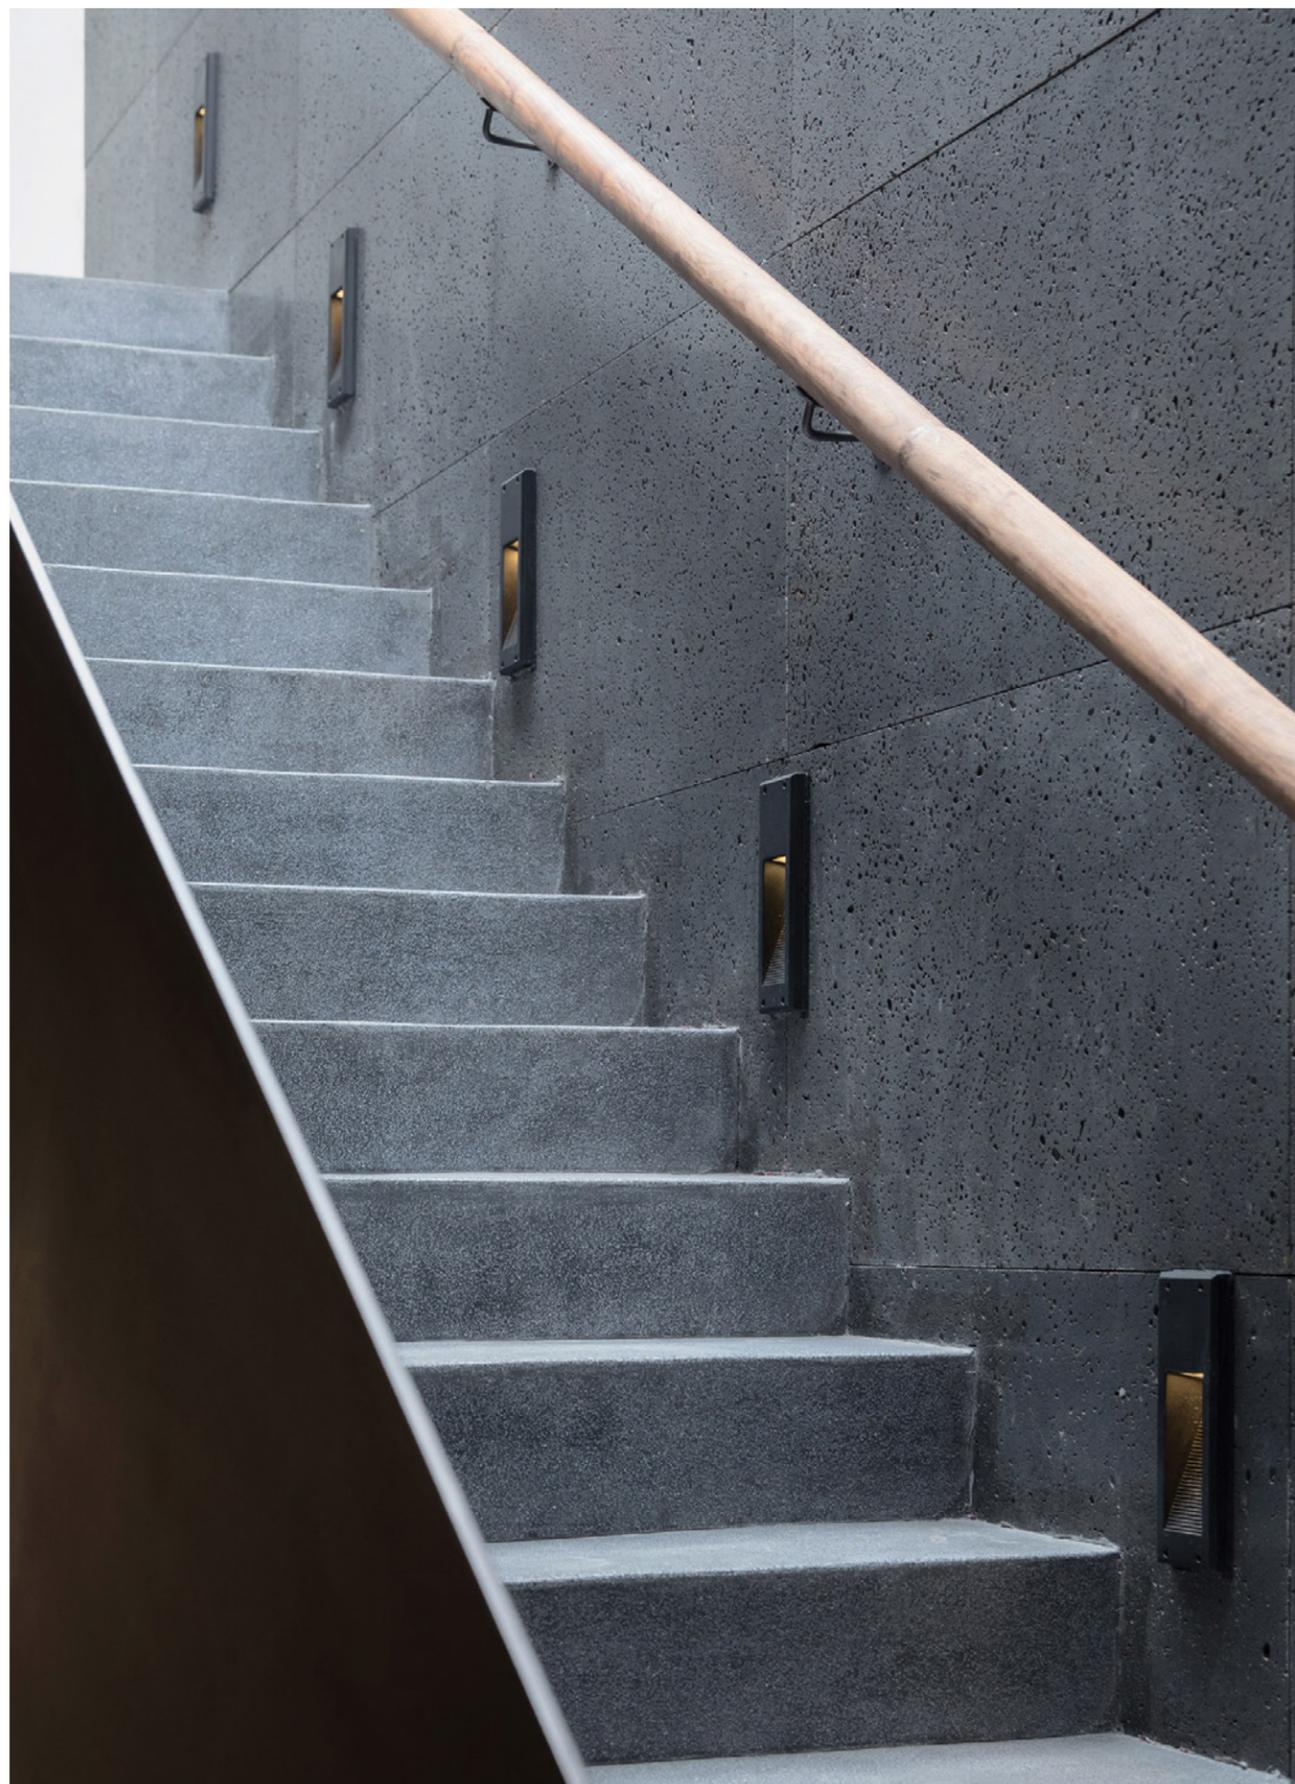



	Light Source	Power	Voltage	Code
<b>ESTA</b> series	SMD LED	4W	90-260V 50/60Hz	DLL-1106-04-K-SB DLL-1106-04-K-DG DLL-1106-04-K-SS DLL-1106-04-K-MG
<b>ESTA</b> series	SMD LED	4W	90-260V 50/60Hz	DLL-1107-04-K-SB DLL-1107-04-K-DG DLL-1107-04-K-SS DLL-1107-04-K-MG
<b>ESTA</b> series	SMD LED	9W	90-260V 50/60Hz	DLL-1108-09-K-SB DLL-1108-09-K-DG DLL-1108-09-K-SS DLL-1108-09-K-MG
<b>ESTA</b> series	SMD LED	9W	90-260V 50/60Hz	DLL-1109-09-K-SB DLL-1109-09-K-DG DLL-1109-09-K-SS DLL-1109-09-K-MG
<b>ESTA</b> series	SMD LED	9W	90-260V 50/60Hz	DLL-1110-09-K-SB DLL-1110-09-K-DG DLL-1110-09-K-SS DLL-1110-09-K-MG
<b>ESTA</b> series	SMD LED	9W	90-260V 50/60Hz	DLL-1111-09-K-SB DLL-1111-09-K-DG DLL-1111-09-K-SS DLL-1111-09-K-MG

Color Temperature: K (3000K 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali


Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: PC

**DIMENSION**  
unit:mm


DLL-1106-04




DLL-1107-04




DLL-1108-09




DLL-1109-09



DLL-1110-09



DLL-1111-09

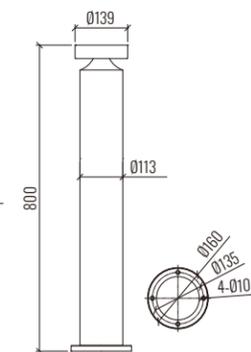



	Light Source	Power	Voltage	Code
<b>OZO</b> series	SMD LED	10W	90-260V 50/60Hz	DLL-1031-10-K-SB DLL-1031-10-K-DG DLL-1031-10-K-SS DLL-1031-10-K-MG
<b>OZO</b> series	SMD LED	10W	90-260V 50/60Hz	DLL-1032-10-K-SB DLL-1032-10-K-DG DLL-1032-10-K-SS DLL-1032-10-K-MG
<b>OZO</b> series	SMD LED	20W	90-260V 50/60Hz	DLL-1033-20-K-SB DLL-1033-20-K-DG DLL-1033-20-K-SS DLL-1033-20-K-MG


Color Temperature: **K** (3000K 6000K)

Colour Finish: **SB**-Sand Black **DG**-Dark Grey **SS**-Sand Silver **MG**-Metal Grey

Controller: On / Off, Dimmable, Dali

Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: PC

**DIMENSION**  
unit:mm

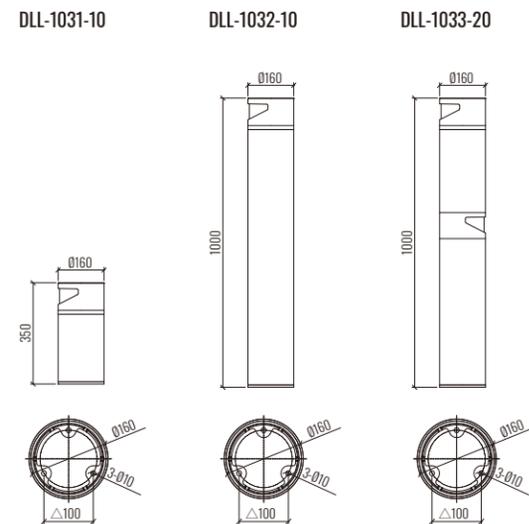



	Light Source	Power	Voltage	Code
<b>AVO series</b>	SMD LED	10W	90-260V 50/60Hz	DLL-1123-10-K-SB DLL-1123-10-K-DG DLL-1123-10-K-SS DLL-1123-10-K-MG
<b>AVO series</b>	SMD LED	10W	90-260V 50/60Hz	DLL-1124-10-K-SB DLL-1124-10-K-DG DLL-1124-10-K-SS DLL-1124-10-K-MG

Color Temperature: K (3000K 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali


Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: PMMA

**DIMENSION**  
unit:mm

DLL-1123-10



DLL-1124-10

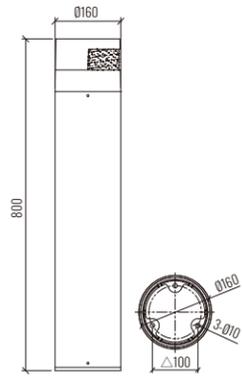



	Light Source	Power	Voltage	Code
<b>CLEO</b> series	SMD LED	12W	90-260V 50/60Hz	DLL-1126-12-K-SB DLL-1126-12-K-DG DLL-1126-12-K-SS DLL-1126-12-K-MG
<b>CLEO</b> series	SMD LED	12W	90-260V 50/60Hz	DLL-1127-12-K-SB DLL-1127-12-K-DG DLL-1127-12-K-SS DLL-1127-12-K-MG

Color Temperature: K (3000K 6000K)

Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey


Controller: On / Off, Dimmable, Dali

Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: PMMA




**DIMENSION**  
unit:mm

DLL-1126-12

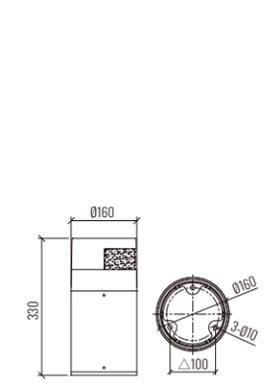

DLL-1127-12

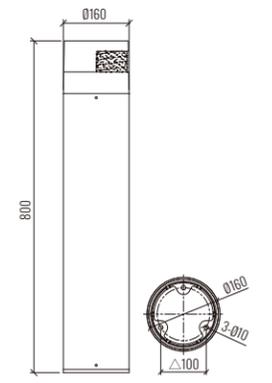



	Light Source	Power	Voltage	Code
<b>PINO</b> series	SMD LED	5W	90-260V 50/60Hz	DLL-1112-05-K-SB DLL-1112-05-K-DG DLL-1112-05-K-SS DLL-1112-05-K-MG
<b>PUK</b> series	SMD LED	15W	90-260V 50/60Hz	DLL-1113-15-K-SB DLL-1113-15-K-DG DLL-1113-15-K-SS DLL-1113-15-K-MG
<b>PUK</b> series	SMD LED	15W	90-260V 50/60Hz	DLL-1114-15-K-SB DLL-1114-15-K-DG DLL-1114-15-K-SS DLL-1114-15-K-MG


Color Temperature: **K** (3000K 6000K)

Colour Finish: **SB**-Sand Black **DG**-Dark Grey **SS**-Sand Silver **MG**-Metal Grey

Controller: On / Off, Dimmable, Dali

Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: PC

**DIMENSION**  
unit:mm

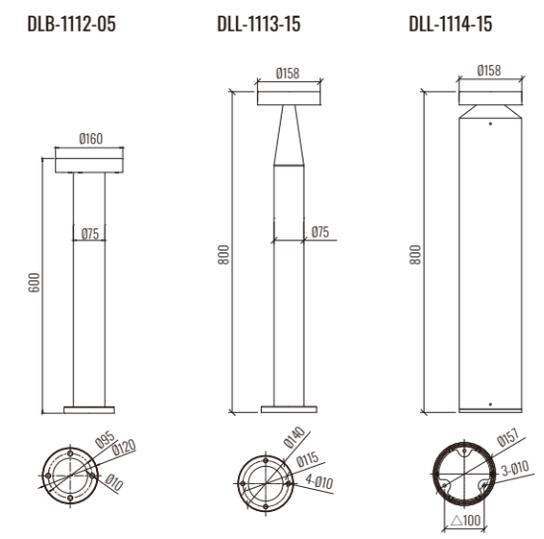



	Light Source	Power	Voltage	Code
<b>INDI</b> series	SMD LED	15W+1W	90-260V 50/60Hz	DLL-1118-16-K-SB DLL-1118-16-K-DG DLL-1118-16-K-SS DLL-1118-16-K-MG
<b>INDI</b> series	SMD LED	15W+1W	90-260V 50/60Hz	DLL-1119-16-K-SB DLL-1119-16-K-DG DLL-1119-16-K-SS DLL-1119-16-K-MG

Color Temperature: **K** (3000K 6000K)


Colour Finish: **SB**-Sand Black **DG**-Dark Grey **SS**-Sand Silver **MG**-Metal Grey

Controller: On / Off, Dimmable, Dali



Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: PC

**DIMENSION**  
unit:mm

DLL-1118-16



DLL-1119-16

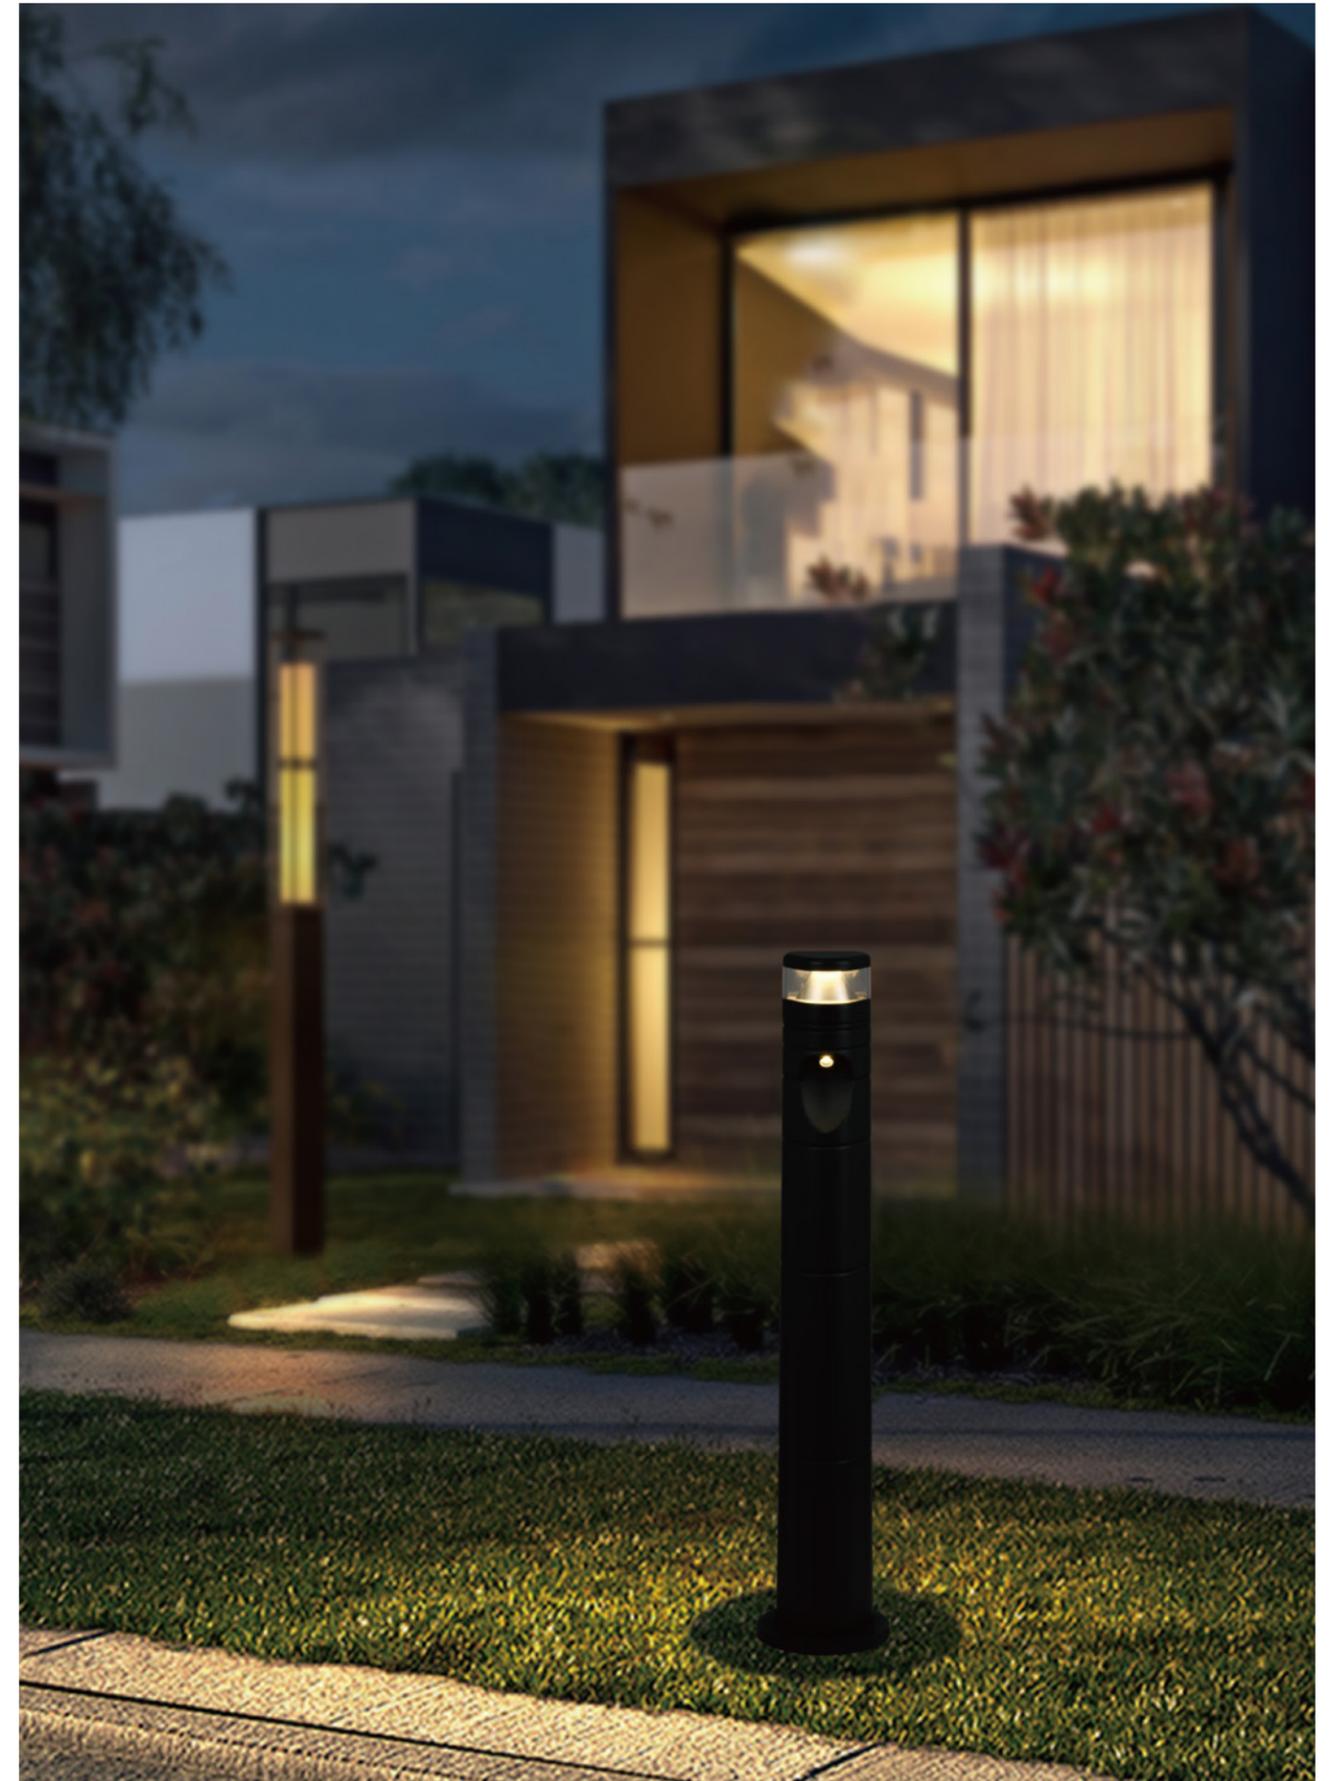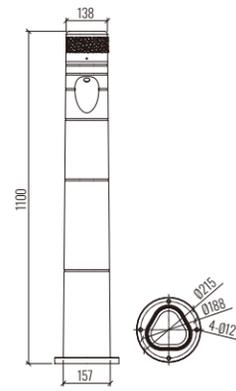



	Light Source	Power	Voltage	Code
<b>SAT</b> series	SMD LED	5W	90-260V 50/60Hz	DLL-7024-05-K-SB DLL-7024-05-K-DG DLL-7024-05-K-SS DLL-7024-05-K-MG
<b>ARCO</b> series	SMD LED	5W	90-260V 50/60Hz	DLL-1970-05-K-SB DLL-1970-05-K-DG DLL-1970-05-K-SS DLL-1970-05-K-MG
<b>PICO</b> series	SMD LED	5W	90-260V 50/60Hz	DLL-6039-05-K-SB DLL-6039-05-K-DG DLL-6039-05-K-SS DLL-6039-05-K-MG

Color Temperature: K (3000K 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali


Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: Clear glass

**DIMENSION**  
unit:mm



DLL-7024-05



DLL-1970-05



DLL-6039-05

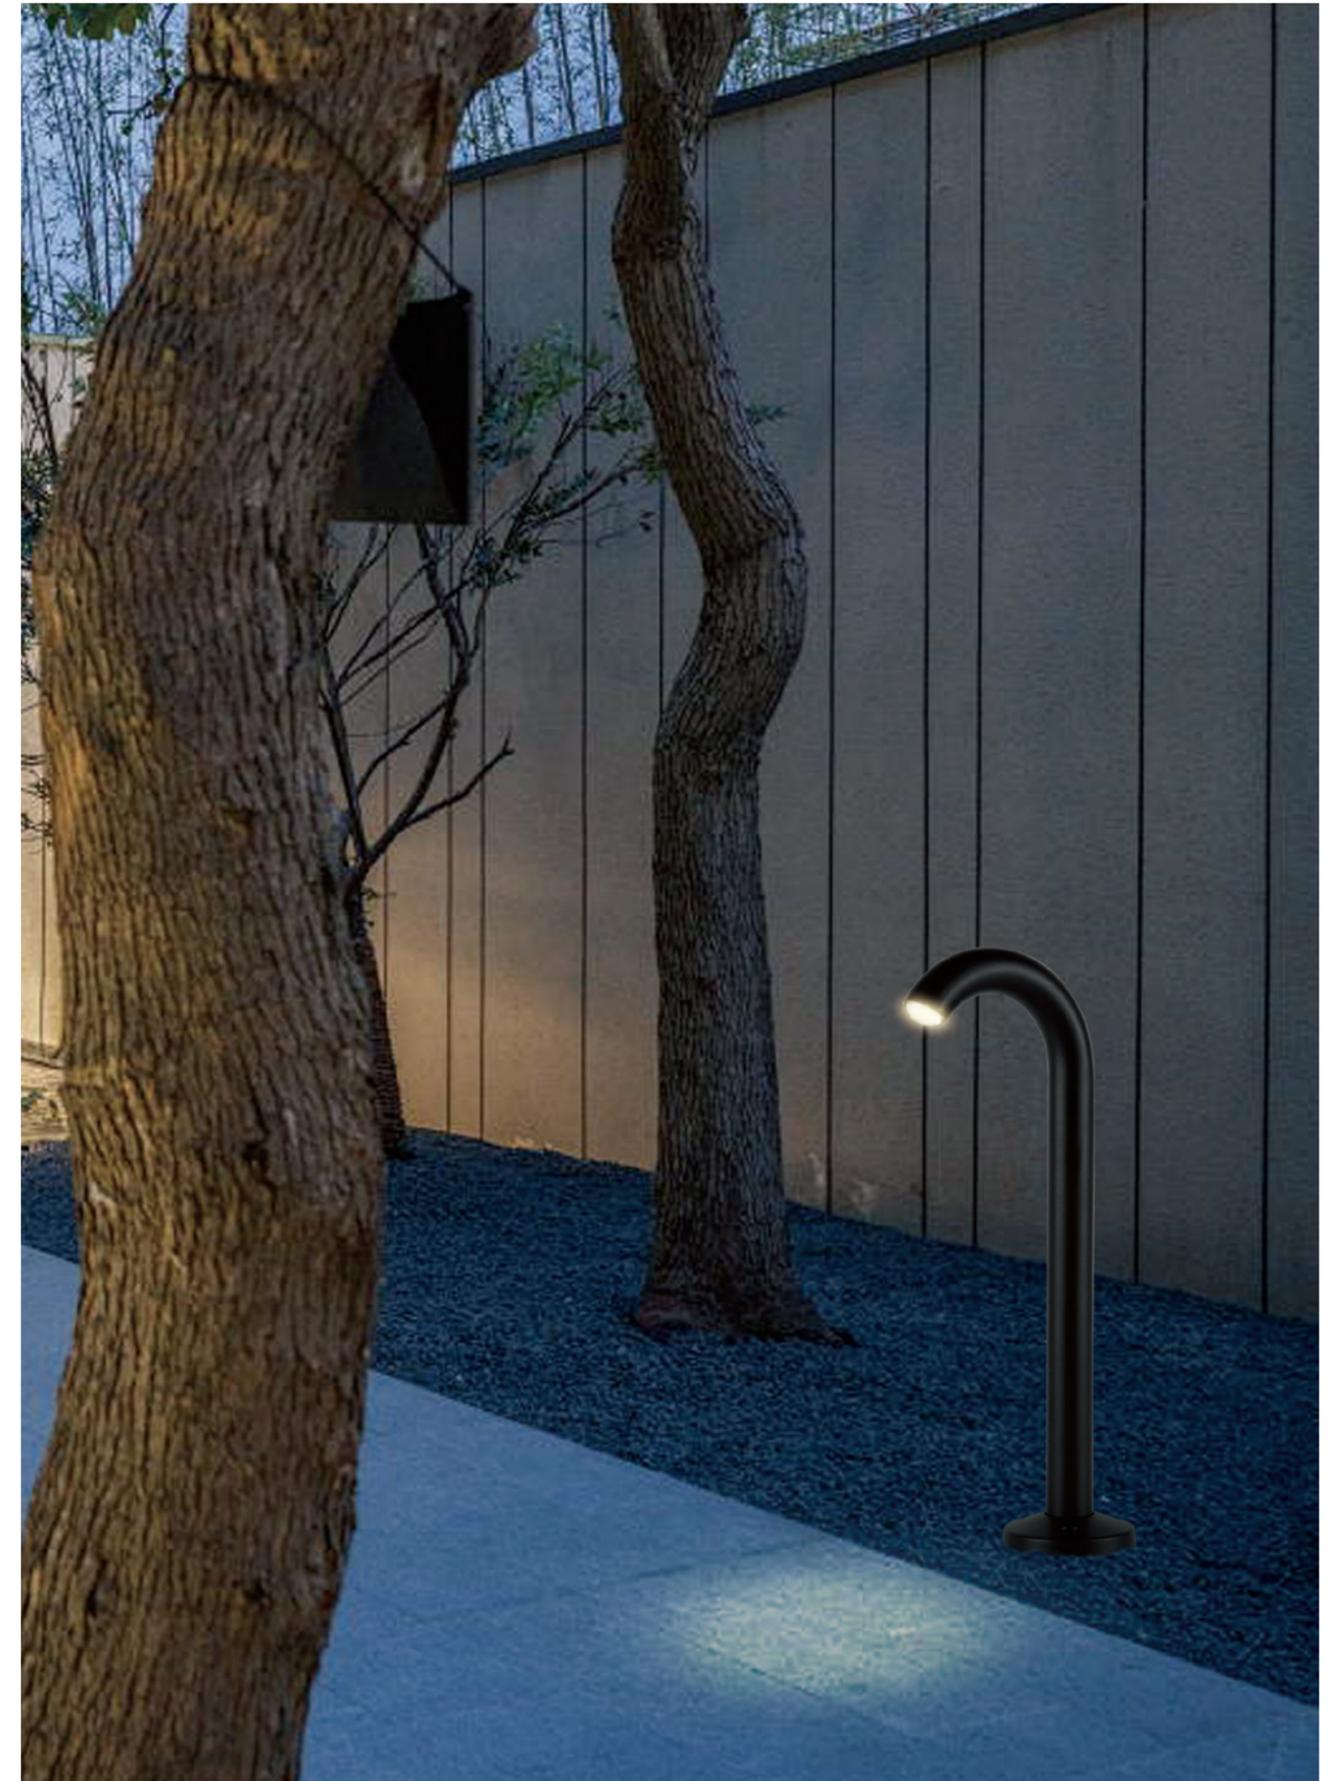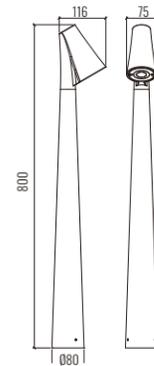



	Light Source	Power	Voltage	Code
<b>BLOCK</b> series	SMD LED	7W	90-260V 50/60Hz	DLL-1136-07-K-SB DLL-1136-07-K-DG DLL-1136-07-K-SS DLL-1136-07-K-MG
<b>BLOCK</b> series	SMD LED	10W	90-260V 50/60Hz	DLL-1137-10-K-SB DLL-1137-10-K-DG DLL-1137-10-K-SS DLL-1137-10-K-MG

Color Temperature: K (3000K 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali


Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: Clear glass

**DIMENSION**  
unit:mm

DLL-1136-07



DLL-1137-10





	Light Source	Power	Voltage	Code
<b>DUNE series</b>	SMD LED	13.5W	90-260V 50/60Hz	DLL-9110-13-K-SB DLL-9110-13-K-DG DLL-9110-13-K-SS DLL-9110-13-K-MG
<b>DUNE series</b>	SMD LED	9W	90-260V 50/60Hz	DLL-9111-09-K-SB DLL-9111-09-K-DG DLL-9111-09-K-SS DLL-9111-09-K-MG

Color Temperature: K (3000K 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali


Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: Clear glass

**DIMENSION**  
unit:mm

DLL-9110-13



DLL-9111-09





	Light Source	Power	Voltage	Code
<b>PHALT series</b>	SMD LED	5W	90-260V 50/60Hz	DLL-1475-05-K-SB DLL-1475-05-K-DG DLL-1475-05-K-SS DLL-1475-05-K-MG
<b>PHALT series</b>	SMD LED	4W	90-260V 50/60Hz	DLL-1476-05-K-SB DLL-1476-05-K-DG DLL-1476-05-K-SS DLL-1476-05-K-MG
<b>PHALT DOUBLE series</b>	SMD LED	10W	90-260V 50/60Hz	DLL-1477-10-K-SB DLL-1477-10-K-DG DLL-1477-10-K-SS DLL-1477-10-K-MG
<b>PHALT DOUBLE series</b>	SMD LED	10W	90-260V 50/60Hz	DLL-1478-10-K-SB DLL-1478-10-K-DG DLL-1478-10-K-SS DLL-1478-10-K-MG


Color Temperature: K (3000K 6000K)

Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali

Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: PMMA

**DIMENSION**  
unit:mm

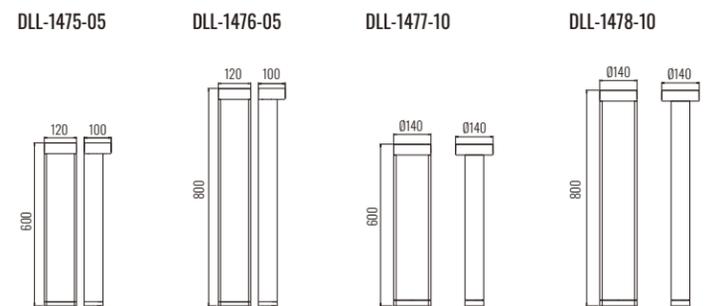



DLL-2670-10



	Light Source	Power	Voltage	Code
<b>DINO</b> series	SMD LED	10W	90-260V 50/60Hz	DLL-2670-10-K-SB DLL-2670-10-K-DG DLL-2670-10-K-SS DLL-2670-10-K-MG
<b>DINO</b> series	SMD LED	5W	90-260V 50/60Hz	DLL-0106-05-K-SB DLL-0106-05-K-DG DLL-0106-05-K-SS DLL-0106-05-K-MG
<b>CAPE</b> series	SMD LED	7W	90-260V 50/60Hz	DLL-1370-07-K-SB DLL-1370-07-K-DG DLL-1370-07-K-SS DLL-1370-07-K-MG

Color Temperature: K (3000K 6000K)

Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey


Controller: On / Off, Dimmable, Dali

Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: Clear glass




DIMENSION  
unit:mm


DLL-2670-10



DLL-0106-05



DLL-1370-07





	Light Source	Power	Voltage	Code
<b>DIME</b> series	SMD LED	6.5W	90-260V 50/60Hz	DLL-13A-TC109-06-K-SB DLL-13A-TC109-06-K-DG DLL-13A-TC109-06-K-SS DLL-13A-TC109-06-K-MG
<b>GOOSET</b> series	SMD LED	5W	90-260V 50/60Hz	DLL-1146-05-K-SB DLL-1146-05-K-DG DLL-1146-05-K-SS DLL-1146-05-K-MG

Color Temperature: K (3000K 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali


Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: Clear glass/PMMA

**DIMENSION**  
unit:mm

DLL-13A-TC109-06



DLL-1146-05





	Light Source	Power	Voltage	Code
<b>PLANK</b> series	SMD LED	5W	90-260V 50/60Hz	DLL-1167-05-K-SB DLL-1167-05-K-DG DLL-1167-05-K-SS DLL-1167-05-K-MG



Color Temperature: **K** (3000K 6000K)

Colour Finish: **SB**-Sand Black **DG**-Dark Grey **SS**-Sand Silver **MG**-Metal Grey

Controller: On / Off, Dimmable, Dali

Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: Clear glass/PMMA

DIMENSION  
unit:mm

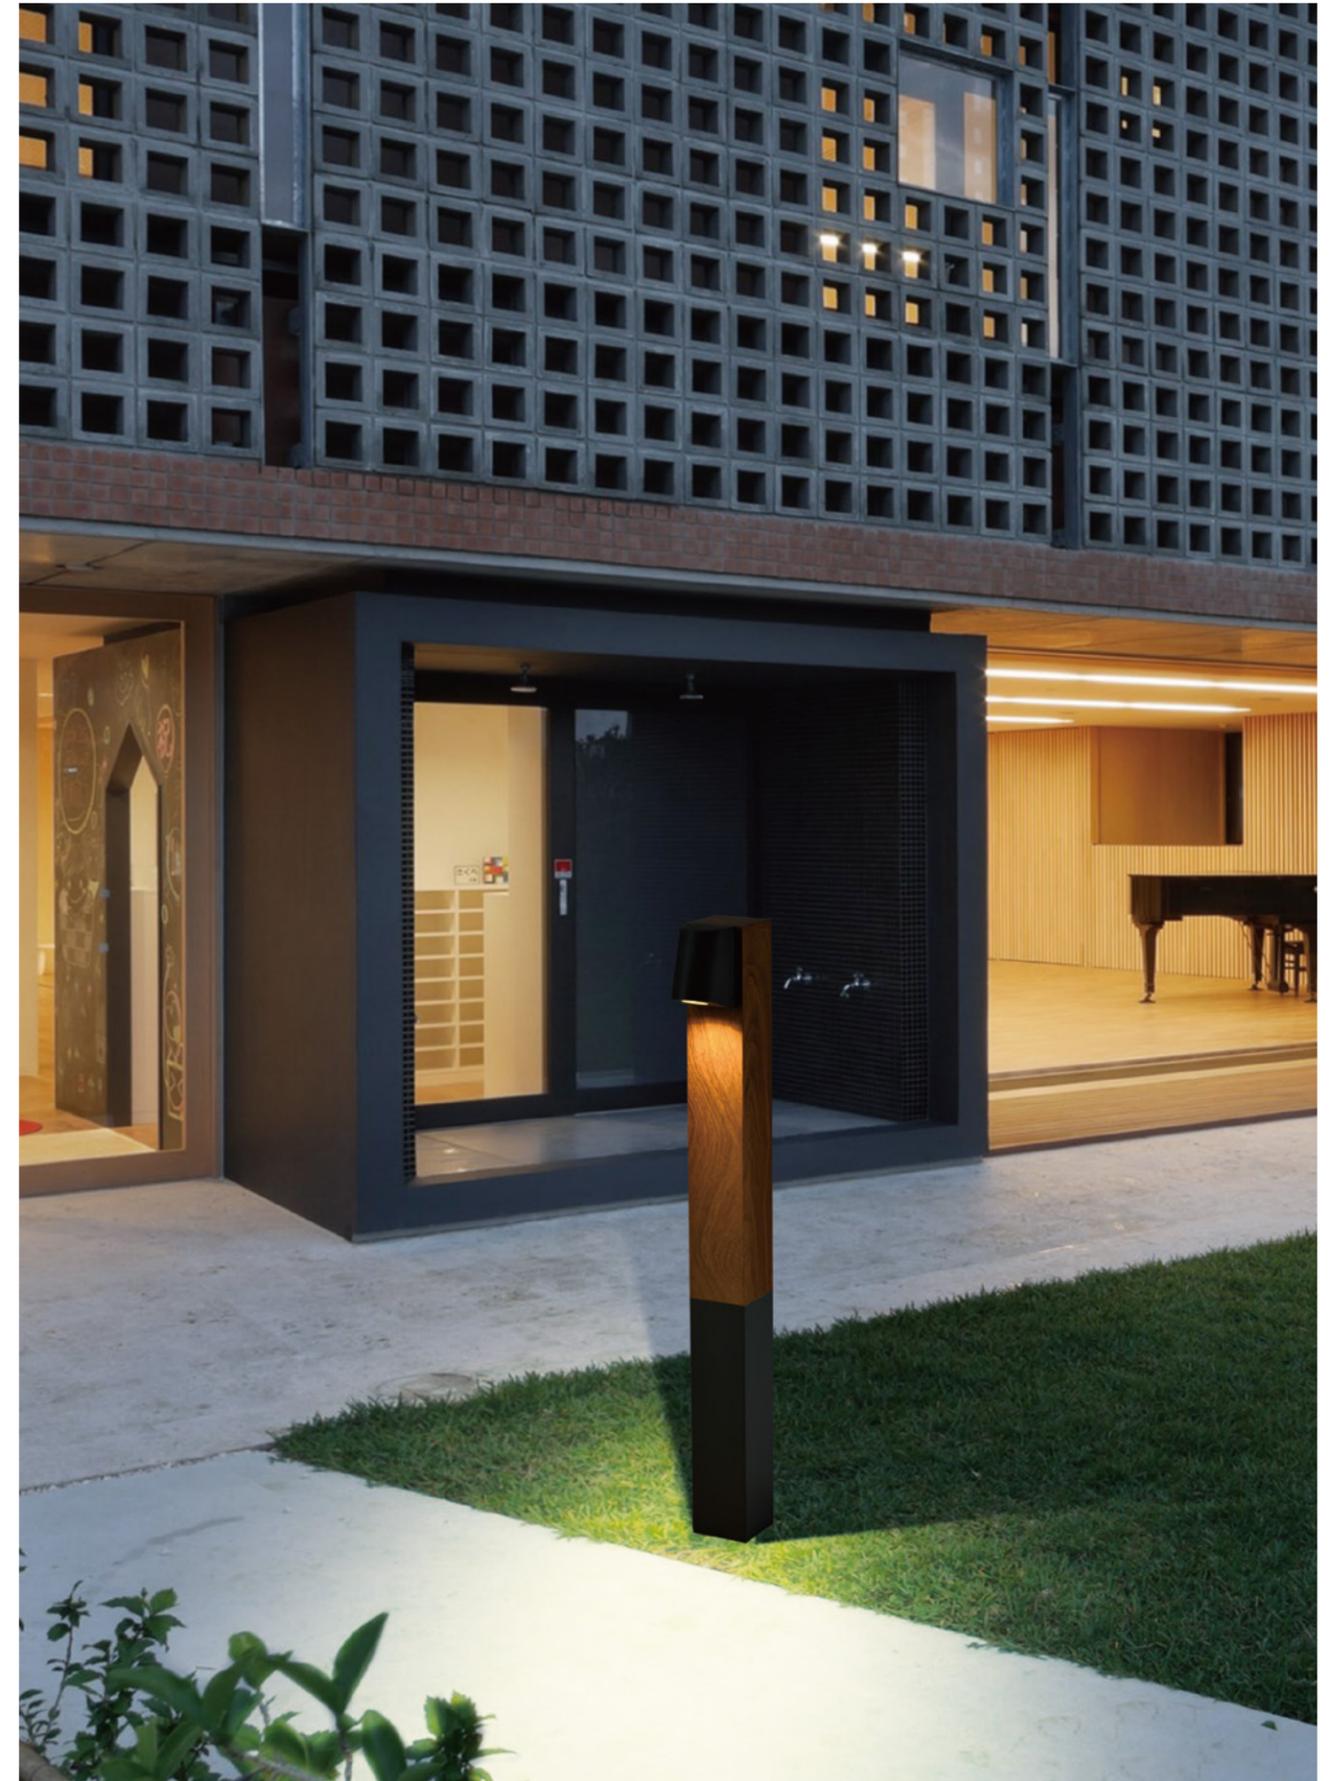



	Light Source	Power	Voltage	Code
<b>NORA series</b>	SMD LED	12W	90-260V 50/60Hz	DLL-9091-12-K-SB DLL-9091-12-K-DG DLL-9091-12-K-SS DLL-9091-12-K-MG
<b>NORA series</b>	SMD LED	10W	90-260V 50/60Hz	DLL-9095-10-K-SB DLL-9095-10-K-DG DLL-9095-10-K-SS DLL-9095-10-K-MG

Color Temperature: K (3000K 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali


Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: Clear glass

**DIMENSION**  
unit:mm

DLL-9091-12



DLL-9095-10





	Light Source	Power	Voltage	Code
<b>NORA</b> series	SMD LED	12W	90-260V 50/60Hz	DLL-1192-12-K-SB DLL-1192-12-K-DG DLL-1192-12-K-SS DLL-1192-12-K-MG
<b>CAVO 2</b> series	SMD LED	5W	90-260V 50/60Hz	DLL-0725-05-K-SB DLL-0725-05-K-DG DLL-0725-05-K-SS DLL-0725-05-K-MG

Color Temperature: K (3000K 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali


Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: Clear glass

**DIMENSION**  
unit:mm

DLL-1192-12



DLL-0725-05





	Light Source	Power	Voltage	Code
<b>FUNNEL</b> series	SMD LED	6W	90-260V 50/60Hz	DLL-13A-TC104-06-K-SB DLL-13A-TC104-06-K-DG DLL-13A-TC104-06-K-SS DLL-13A-TC104-06-K-MG
<b>FUNNEL</b> series	SMD LED	10W	90-260V 50/60Hz	DLL-13A-TC102-10-K-SB DLL-13A-TC102-10-K-DG DLL-13A-TC102-10-K-SS DLL-13A-TC102-10-K-MG

Color Temperature: K (3000K 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali


Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: Glass

**DIMENSION**  
unit:mm

DLL-13A-TC104-06



DLL-13A-TC102-10





	Light Source	Power	Voltage	Code
<b>TEE series</b>	SMD LED	20W	90-260V 50/60Hz	DLL-13A-TC101-20-K-SB DLL-13A-TC101-20-K-DG DLL-13A-TC101-20-K-SS DLL-13A-TC101-20-K-MG

Color Temperature: **K** (3000K 6000K)

Colour Finish: **SB**-Sand Black **DG**-Dark Grey **SS**-Sand Silver **MG**-Metal Grey

Controller: On / Off, Dimmable, Dali

Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: Glass

**DIMENSION**  
unit:mm





	Light Source	Power	Voltage	Code
<b>020</b> series	SMD LED	45W	90-260V 50/60Hz	DLL-1030-45-K-SB DLL-1030-45-K-DG DLL-1030-45-K-SS DLL-1030-45-K-MG


Color Temperature: K (3000K 6000K)

Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali

Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: Clear glass

**DIMENSION**  
unit:mm

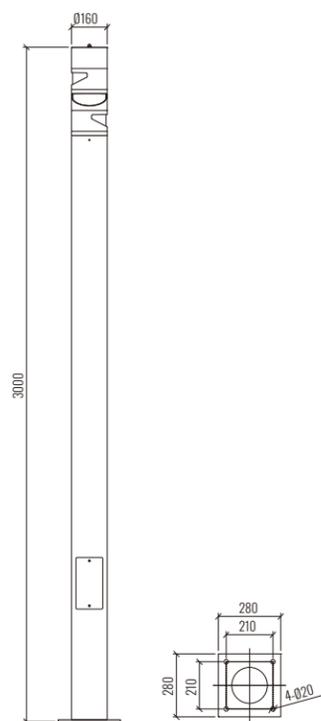



	Light Source	Power	Voltage	Code
<b>UFO series</b>	SMD LED	80W	90-260V 50/60Hz	DLL-1077-80-K-SB DLL-1077-80-K-DG DLL-1077-80-K-SS DLL-1077-80-K-MG
<b>UFO series</b>	SMD LED	2x80W	90-260V 50/60Hz	DLL-1076-160-K-SB DLL-1076-160-K-DG DLL-1076-160-K-SS DLL-1076-160-K-MG

Color Temperature: K (3000K 6000K)


Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali


Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: Clear glass

**DIMENSION**  
unit:mm

DLL-1077-80

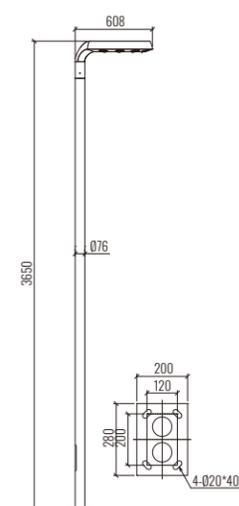

DLL-1076-160

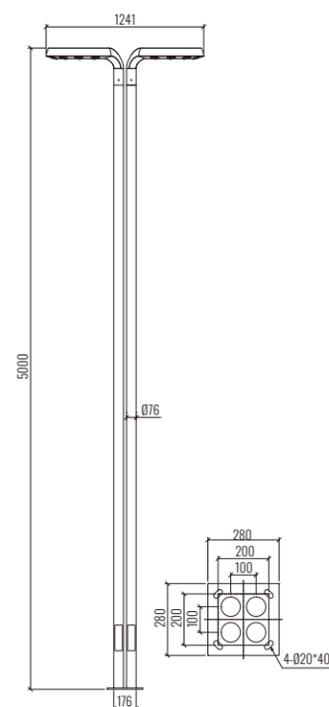



	Light Source	Power	Voltage	Code
<b>VIVO</b> series	SMD LED	50W	90-260V 50/60Hz	DLL-1090-50-K-SB DLL-1090-50-K-DG DLL-1090-50-K-SS DLL-1090-50-K-MG


Color Temperature: K (3000K 6000K)

Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali

Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: Clear polycarbonate

**DIMENSION**  
unit:mm

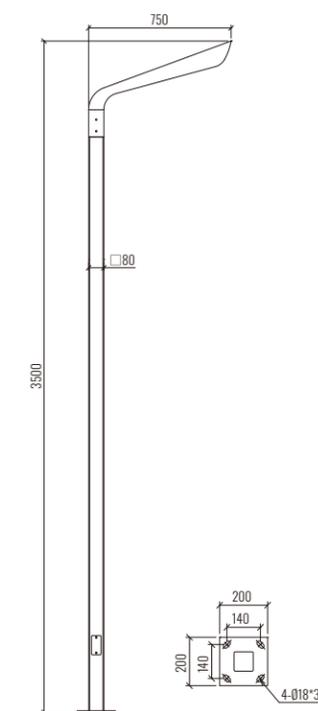



60W

	Light Source	Power	Voltage	Code
<b>VIVO DOUBLE</b> series	SMD LED	50W	90-260V 50/60Hz	DHB-1093-60-K-SB DHB-1093-60-K-DG DHB-1093-60-K-SS DHB-1093-60-K-MG


Color Temperature: K (3000K 6000K)

Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali

Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: Clear polycarbonate

**DIMENSION**  
unit:mm

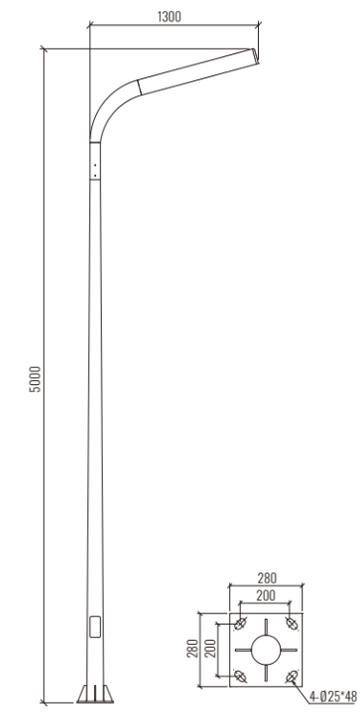



	Light Source	Power	Voltage	Code
<b>CLUB</b> series	SMD LED	50W	90-260V 50/60Hz	<b>DLL-1091-50-K-SB</b> <b>DLL-1091-50-K-DG</b> <b>DLL-1091-50-K-SS</b> <b>DLL-1091-50-K-MG</b>
<b>CLUB</b> series	SMD LED	2x50W	90-260V 50/60Hz	<b>DLL-1092-100-K-SB</b> <b>DLL-1092-100-K-DG</b> <b>DLL-1092-100-K-SS</b> <b>DLL-1092-100-K-MG</b>

Color Temperature: **K** (3000K 6000K)


Colour Finish: **SB**-Sand Black **DG**-Dark Grey **SS**-Sand Silver **MG**-Metal Grey

Controller: On / Off, Dimmable, Dali


Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: Clear glass

**DIMENSION**  
unit:mm

DLL-1091-50

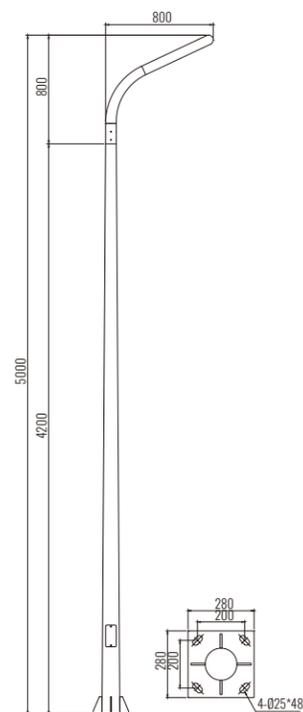

DLL-1092-100

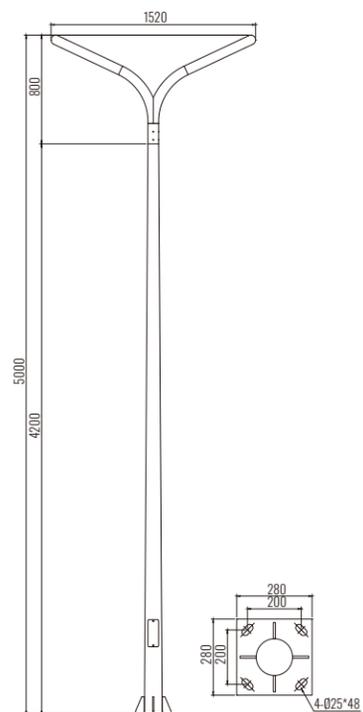



	Light Source	Power	Voltage	Code
<b>CAVO</b> series	SMD LED	30W	90-260V 50/60Hz	DLL-9035-30-K-SB DLL-9035-30-K-DG DLL-9035-30-K-SS DLL-9035-30-K-MG
<b>CAVO</b> series	SMD LED	2x30W	90-260V 50/60Hz	DLL-9036-60-K-SB DLL-9036-60-K-DG DLL-9036-60-K-SS DLL-9036-60-K-MG
<b>CAVO</b> series	SMD LED	30W	90-260V 50/60Hz	DLL-9037-30-K-SB DLL-9037-30-K-DG DLL-9037-30-K-SS DLL-9037-30-K-MG
<b>CAVO</b> series	SMD LED	2x30W	90-260V 50/60Hz	DLL-9034-60-K-SB DLL-9034-60-K-DG DLL-9034-60-K-SS DLL-9034-60-K-MG

Color Temperature: K (3000K 6000K)

Colour Finish: SB-Sand Black DG-Dark Grey SS-Sand Silver MG-Metal Grey

Controller: On / Off, Dimmable, Dali

Material: Aluminum  
Coating: Anti-corrosion and UV-proof powder coating  
Diffuser: Clear polycarbonate



DLL-9034-60



DLL-9036-60

DLL-9035-30

DLL-9037-30